

ARESCO

877.2ARESCO or 877.227.3726



ATLAS

Automotive Equipment

PVL10

The ALI CERTIFIED Atlas Platinum PVL10 was engineered and built to offer a commercial grade above ground lift to those customers who have “fallen in love” with the reliability offered by the Double S column design and symmetric columns. Tens of thousands of above ground lifts incorporating the Double S column design have been sold worldwide over the past two decades. The Double S column design was so revolutionary, that it was protected by a patent. That patent has now expired.

The Atlas Platinum PVL10 can be installed with the columns positioned symmetrically or asymmetrically. When the columns are installed in the asymmetrical configuration, there may be some benefit to open car doors. When the columns are installed in the symmetric configuration there is more width between the columns. Please check the specifications page and picture gallery to determine which height setting and column configuration (asymmetrical or symmetrical) would be the best for your application. Both column configurations offer easy vehicle access and superior vehicle lift point support due to the three stage front arm design. The Atlas Platinum PVL10 features three (3) stage telescoping front arms, double screw rubber/metal adapters with truck height extensions, protective rubber pads mounted to the carriage, rubber column guards, and a price that cannot be matched.



Features

- 10,000 lb. Capacity
- Column design incorporates special Double S bends to increase column strength.
- Padded Carriages
- Columns can be installed Asymmetrically or Symmetrically
- Higher quality powder coating
- Single point lock release
- Double screw-up adapter kit included
- Truck adapter set included
- 3 stage front arms and 2 stage rear arms offer more options

Sales & Service ~ New and Used Equipment ~ Parts for all Models ~ Training & Installation

Visit our new warehouse
in Southfield, MI

Customer Pick-up
available

Automotive Repair Equipment Supply Company

22150 8 Mile Rd., Southfield, MI 48033

www.aresco.org



Prices and specifications are subject to change without notice.


ARESCO

877.2ARESCO or 877.227.3726




ATLAS PVL10

Automotive Equipment

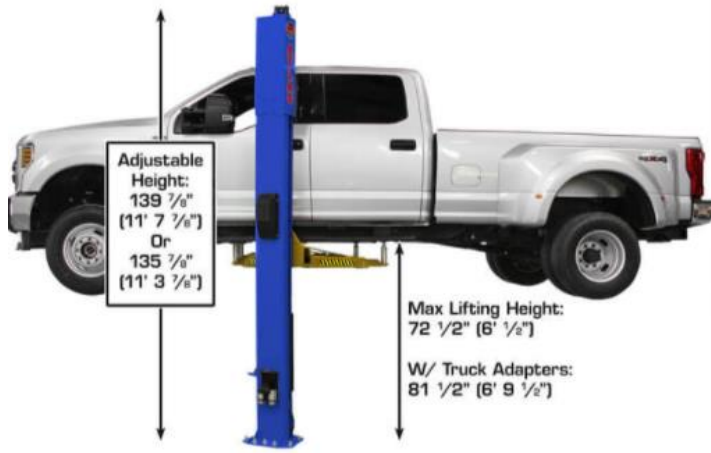

Asymmetrical Configuration

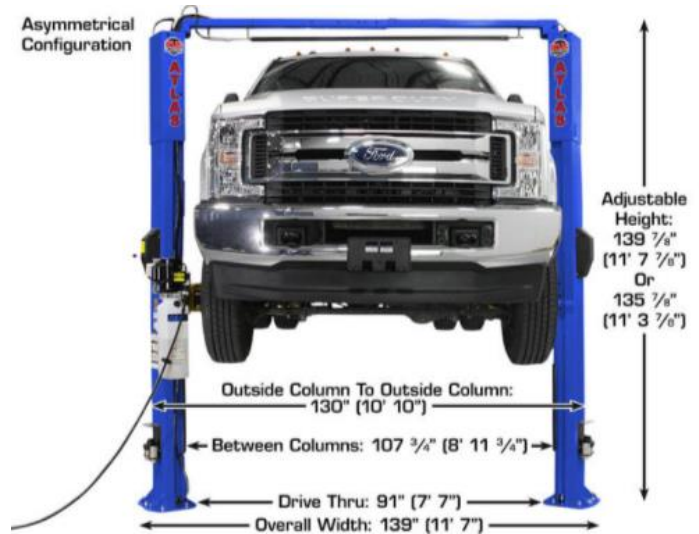

Specifications		
Setup	High	Low*
Capacity	10,000 LB.	
Overall Height With Cylinder	148" (12' 4")	
Overall Height	139 7/8" (11' 7 7/8")	135 7/8" (11' 3 7/8")*
Overall Floor Width	139" (11' 7") Asymmetrical	
	137 1/2" (11' 5 1/2") Symmetrical	
Outside Column to Outside Column	130" (10' 10") Asymmetrical	
	129 1/4" (10' 9 1/4") Symmetrical	
Maximum Lift Height (With Adapters)	81 1/2" (6' 9 1/2") Highest Pad Setting	
Maximum Lift Height (Without Adapters)	72 1/2" (6' 1/2") Highest Pad Setting	
Pad Height	4"	
Adapter Heights	4 Each: 3" & 6"	
Minimum Arm Height	4"	
Column Size	7" x 10 1/4"	
Drive Through	91" (7' 7") Asymmetrical	
	99 1/2" (8' 3 1/2") Symmetrical	
Base of Lift	15" x 18"	
Column Thickness of Steel	6mm	
Motor/Electrical Requirement	220V Single Phase, 30 Amp Breaker Recommended	
Shipping Weight	1,850 Lbs.	

Requires a minimum of 4" of concrete with 3000 psi.

All lifts come with a step by step instruction manual.

*Requires the purchase of additional shorter cables.

Automotive Repair Equipment Supply Company

22150 8 Mile Rd., Southfield, MI 48033

www.aresco.org

Prices and specifications are subject to change without notice.